

HIGH RATE SERIES



UPS12-200

**VALVE REGULATED
LEAD ACID BATTERY
FOR UPS STANDBY
POWER APPLICATIONS
12V 54 AH @ 20 HR RATE,
12V 203 WATTS/CELL
@ 15 MIN. RATE**

FEATURES

- 10 Year design life @ 25°C (77°F)
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance.
- Patented flame-arresting one-way pressure-relief valve providing vacuum and controlled backpressure for long life recombinant operation.
- Designed to comply with ANSI and Eurobat battery standards.
- Specifically designed for optimum performance in UPS applications.
- Proprietary computer modeled radial grid matrix using multiple conductors for providing the lowest internal resistance and highest current carrying efficiency.
- Proprietary Fixed Orifice Pasting technology applying active material on both sides of the grid for consistent cell-to-cell performance, highest paste packing efficiency and uniform grid protection.
- Lowest calcium levels among battery manufacturers minimizing grid growth and extending battery life.
- UL-recognized component.
- Thermally welded case-to-cover bond to eliminate leakage.
- Can be mounted in any orientation. Upright, side or end mounting recommended.
- Not restricted for air transport – Complies with IATA/ICAO Special Provision A67.
- Not restricted for surface transport – Classified as non-hazardous material as related to DOT-CFR Title 49 parts 171-189.
- Flame retardant polypropylene case and cover compliant with UL 1778 (optional).

12 Volts – 203 Watts Per Cell For 15 Minutes to 1.67 Volts per Cell


Constant Power Discharge Ratings – Watts Per Cell @ 77°F (25°C)

End Point Volts/Cell	Operating Time to End Point Voltage (in minutes)									
	5	10	15	20	30	40	45	50	60	90
1.67	370	254	203	166	125	101	92	85	74	54

C&D Technologies, Inc.
DYNASTY Division
900 East Keefe Avenue
Milwaukee, WI 53212
Phone: 800-396-2789
Fax: 414-961-6506



UPS12-200

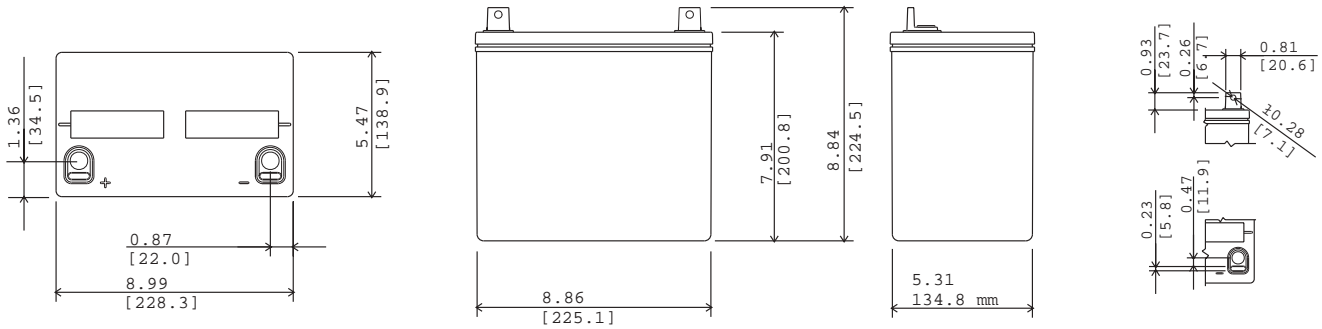

*All dimensions in inches and (millimeters). All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.

UPS12-200 – Specifications

Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum Discharge Current	Short Circuit Current	Ohms Imped. 60 Hz (w)
6	12.84	40 lbs. 18 kg	Absorbed H ₂ SO ₄ SG = 1.300	600 Amps	3000 Amps @ 0.1 sec.	0.0045 Ohms
Capacity		203 watts per cell at the 15 minute rate to 1.67 volts per cell at 77° F (25° C). 54 Ah @ 20 hr. rate to 1.75 volts per cell @ 77° F (25° C) 49 Ah @ 10 hr rate to 1.80 volts per cell @ 20° C (68° F)				
Operating Temperature Range		Discharge; -40° F (-40° C) to +160° F (71° C), Charge; -10° F (-23° C) to +140° F (60° C) (with temperature compensation)				
Nominal Operating Temperature Range		+74° F (23° C) to +80° F (27° C)				
Float Charging Voltage		13.5 to 13.8 VDC/unit Average at 77° F (25° C).				
Recommended Maximum Charging Current Limit		C/5 amperes (10.8 amperes @ 100% depth of discharge) @ 20 hour rate				
Equalization and Cycle Service Charging Voltage		14.4 to 14.8 VDC/unit Average at 77° F (25° C).				
Maximum AC Ripple (Charger)		0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4%P-P) Maximum current allowed = 2.7 amperes RMS (C/20)				
Self Discharge		Dynasty UPS batteries may be stored for up to 6 months at 77° F (25° C) and then a refreshing charge is required. For higher temperatures the time interval will be shorter.				
Accessories		Inter unit connectors, racks and cabinet systems are available.				
Terminal		"L" terminal with 0.28" clearance hole to accept 0.25" (6mm) bolt.				
Terminal Hardware Initial Torque		40 in.-lbs. (4.5 N-m).				
Terminal Hardware Annual Retorque		32 in.-lbs. (3.48 N-m).				

Constant Power Discharge Ratings – Watts Per Cell @ 77°F (25°C)

Operating Time to End Point Voltage (in minutes)

End Point Volts/Cell	5	10	15	20	30	40	45	50	60	90
1.75	338	243	195	160	121	98	90	83.6	72.0	52.0
1.70	360	250	200	164	124	100	91	84.2	73.0	53.0
1.67	370	254	203	166	125	101	92	85.3	73.7	53.5
1.65	375	257	204	168	126	102	94	86.6	74.5	54.0
1.60	385	262	208	171	128	104	95	88.2	76.2	55.0

Constant Current Discharge Ratings – Amperes @ 77°F (25°C)

Operating Time to End Point Voltage (in hours)

End Point Volts/Cell	.083	.25	.50	.75	1	2	3	5	8	10	12	20	24	72	100
1.90	131	81	52	39	31.3	18.2	13.0	8.50	5.66	4.61	3.90	2.39	2.01	0.71	0.53
1.85	151	88	56	41	33.4	19.2	13.7	8.90	5.90	4.85	4.08	2.50	2.10	0.73	0.54
1.80	165	95	60	44	35.2	20.2	14.5	9.40	6.21	5.09	4.29	2.63	2.21	0.75	0.55
1.75	183	102	62	46	36.7	20.9	15.0	9.70	6.46	5.28	4.47	2.72	2.28	0.78	0.57

Note: Batteries to be mounted with 0.5 in (1.25 cm) spacing minimum and free air ventilation. Specifications subject to change without notification.