



SLA BATTERY

RT 640 6V4AH



RT Series


RT Series Valve Regulated Lead Acid batteries is designed with AGM (Absorbent Glass Mat) technology, special thicker plates and high purity electrolyte exerts stable performance with long life and the unique 2# additive gives higher capacity than its standard which widely used in the field of UPS, Emergency Lighting System ect.

Application

- | | |
|-------------------------|------------------------|
| Alarm System | Medical Equipment |
| Cable Television | UPS |
| Communication Equipment | Power tools |
| Control Equipment | Emergency Power System |
| Security System | Toys |

General Features




- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

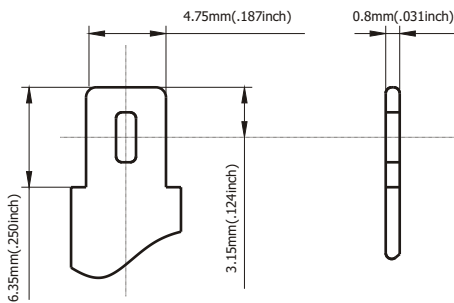

Terminal Dimensions

Construction

- | | | | |
|-----------|-------------------|--------------|--------------------|
| Component |Raw material | Sealant |Epoxy Resin |
| Positive |Lead dioxide | Safety valve |EPDR |
| Negative |Lead | Terminal |Copper |
| Container |ABS | Separator |Fiber glass |
| Cover |ABS | Electrolyte |Sulfuric acid |

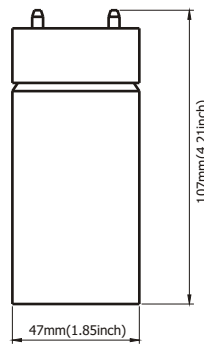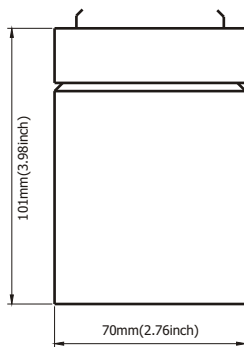


Battery Model	RT 640 6V4AH			
Designed Floating Life	5 Years			
Capacity(25°C)	20HR(0.21A,1.75V)	10HR(0.4A,1.75V)	5HR(0.71A,1.75V)	1HR(2.76A,1.75V)
	4.2AH	4AH	3.55AH	2.76AH
Dimensions	Length	Width	Height	Total Height
	70mm(2.76inch)	47mm(1.85inch)	101mm(3.98inch)	107mm(4.21inch)
Approx. Weight	0.72Kg (1.58 lbs)			
Internal Resistance	Full charged at 25°C: 0.032 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/ °C), max. Current: 1.2A		6.8-6.9V(-10mV/ °C)	



SLA BATTERY

RT 640 6V4AH

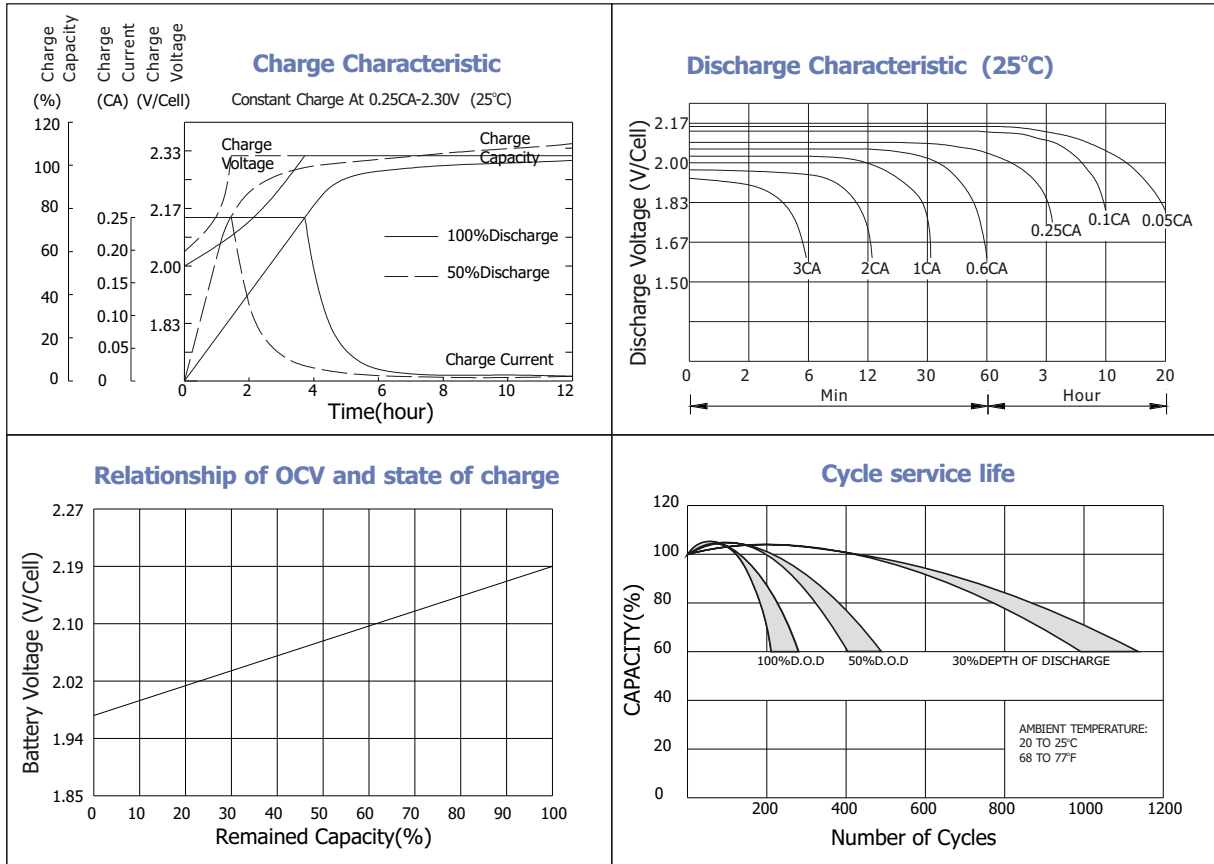

Constant current discharge ratings-amperes at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	15.2	9.48	7.15	4.36	2.77	1.22	0.74	0.42	0.22
1.67V	14.3	8.99	6.88	4.17	2.74	1.17	0.73	0.41	0.21
1.70V	13.1	8.67	6.72	3.79	2.65	1.09	0.71	0.41	0.21
1.75V	12.8	8.40	6.50	3.60	2.53	1.06	0.70	0.40	0.20
1.80V	11.5	8.02	5.90	3.34	2.37	1.01	0.66	0.40	0.20
1.85V	10.1	7.64	5.31	3.07	2.20	0.98	0.61	0.39	0.19

Constant power discharge ratings-watts at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	26.7	17.1	13.1	7.85	5.00	2.16	1.26	0.83	0.44
1.67V	25.8	16.7	12.9	7.69	4.97	2.09	1.25	0.83	0.42
1.70V	24.3	16.5	12.8	7.20	4.88	2.00	1.24	0.82	0.42
1.75V	24.4	16.5	12.7	6.99	4.79	1.95	1.22	0.81	0.41
1.80V	22.4	16.2	11.8	6.66	4.52	1.89	1.19	0.80	0.40
1.85V	20.3	15.4	10.7	6.24	4.25	1.84	1.15	0.79	0.38



ISO9001:2000 Certificate



G4M20206-0910-E-16



MH28539



RBRC

